



HOW TO USE TOTIM[®]Racing KIT FOAM SEAT




1 PLACE TOTIM[®]RACING ON A RIGID FLAT SURFACE IDENTIFY THE "SIDE UP" SYMBOL



2 PUT YOUR HAND IN A DIAGONAL POSITION TO PROTECT THE UPPER WELDING



INTERNAL POUCH WITH 2 POCKETS A & B

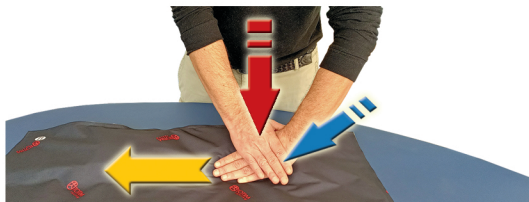

3 APPLY FIRM PRESSURE IN THE DIRECTION OF THE OPPOSITE POCKET TO BREAK THE CENTRAL SEALS



4 IF NECESSARY REPEAT THE PRESSURE IN THE DIRECTION OF THE OPPOSITE POCKET



5 MIX VIGOROUSLY TO SHIFT THE TWO COMPONENTS FROM ONE SIDE TO THE OTHER



6 ONCE THE INNER POUCH IS SWOLLEN, WAIT FOR IT TO 'POP' OPEN AUTONOMOUSLY

➡ MIX ACTIVATION TIME: about 50 seconds

➡ AFTER THE 'POP' REMOVE COMPLETELY THE FOAM FROM THE POCKET INSIDE AND SPREAD IT IN THE SEAT

➡ PUT THE SEAT INTO THE CAR AND THEN THE DRIVER CAN GET INSIDE AFTER 40/50 seconds

➡ WAITING TIME FOR THE DRIVER IN THE CAR: 15/20 minutes

➡ WAITING TIME BEFORE CUTTING THE SEAT: 40 minutes